



Model BMC200C/MC200C

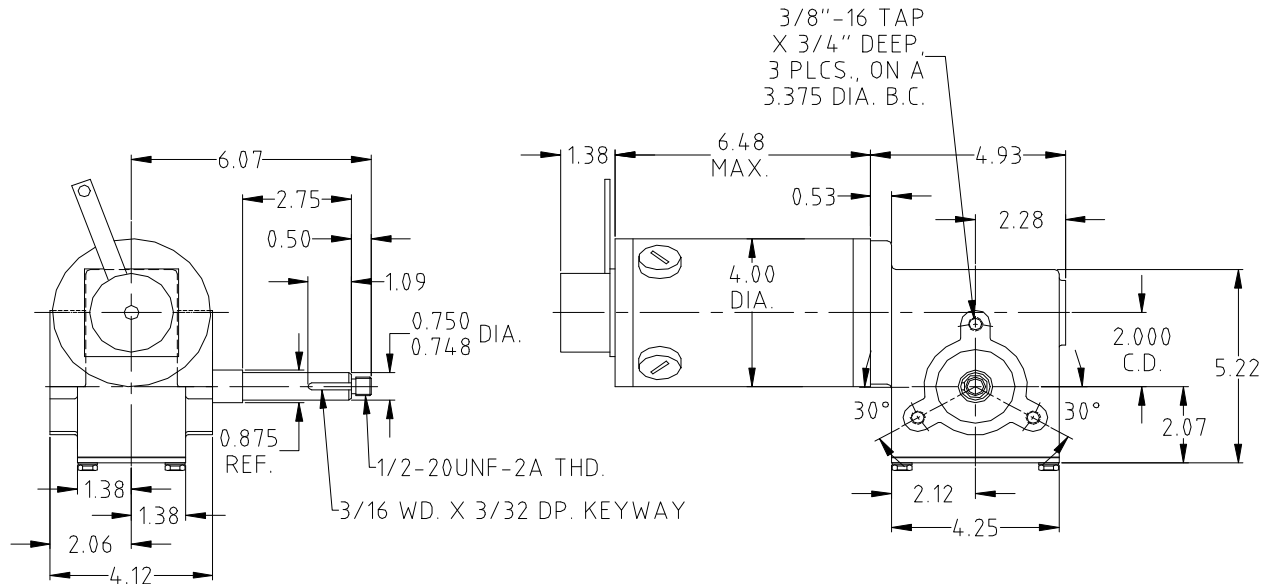

Part No.	Ratio	Output R.P.M.	Motor R.P.M.	Voltage	Hp	Duty	Torque	Motor Dia	Weight	Man. Rel. Brake
BMC200C-4229C-5	5	680	3400	24 VDC	0.44	Cont.	41 in-lbs.	4"	18.9 lbs.	35 in-lbs.
BMC200C-4229C-10	10	340	3400	24 VDC	0.44	Cont.	81 in-lbs.	4"	18.9 lbs.	35 in-lbs.
BMC200C-4229C-18	18	189	3400	24 VDC	0.44	Cont.	146 in-lbs.	4"	18.9 lbs.	35 in-lbs.
BMC200C-4229C-22.3	22.3	152	3400	24 VDC	0.44	Cont.	181 in-lbs.	4"	18.9 lbs.	35 in-lbs.

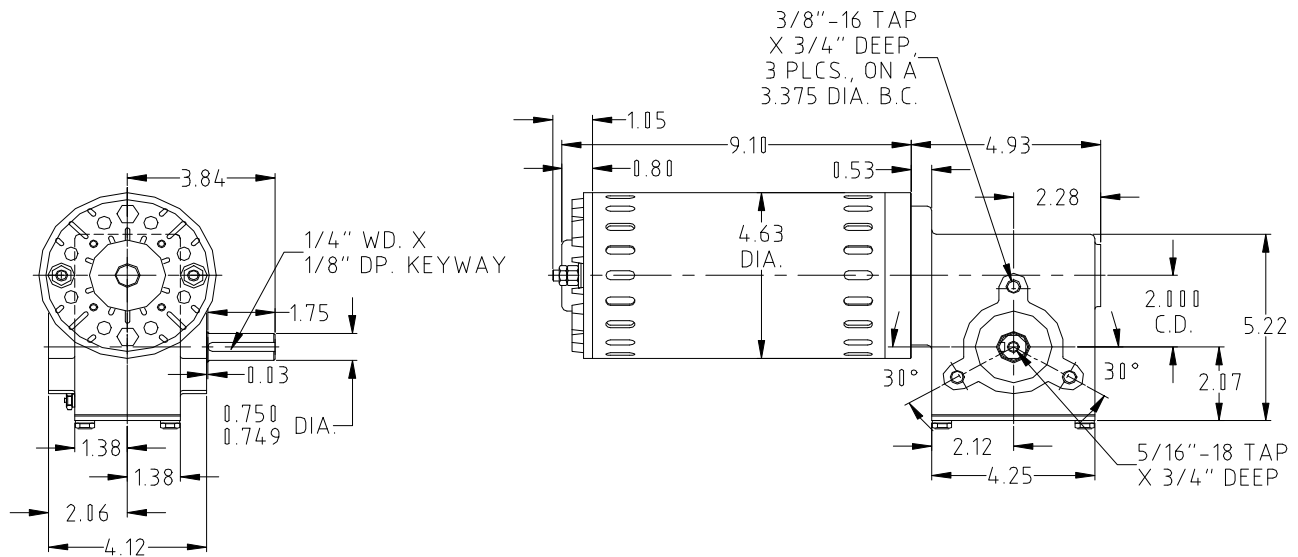

Part No.	Ratio	Output R.P.M.	Motor R.P.M.	Voltage	Hp	Duty	Torque	Motor Dia	Weight	Man. Rel. Brake
MC200C-4129C-2.75	2.75	1818	5000	36 VDC	1.7	Cont.	59 in-lbs.	4-5/8"	23.6 lbs.	N/A
MC200C-4129C-10	10	500	5000	36 VDC	1.7	Cont.	214 in-lbs.	4-5/8"	23.6 lbs.	N/A
MC200C-4129C-18.5	18.5	270	5000	36 VDC	1.7	Cont.	397 in-lbs.	4-5/8"	23.6 lbs.	N/A
MC200C-4129C-25	25	200	5000	36 VDC	1.7	Cont.	535 in-lbs.	4-5/8"	23.6 lbs.	N/A

- Custom output shafts and ratios are available upon request.
- Dimensions are for reference only, request certified prints for construction purposes.
- Units are available in R.H., L.H., and double extended output configurations.



A Division of Imperial Electric